


## Automation for accurate positioning

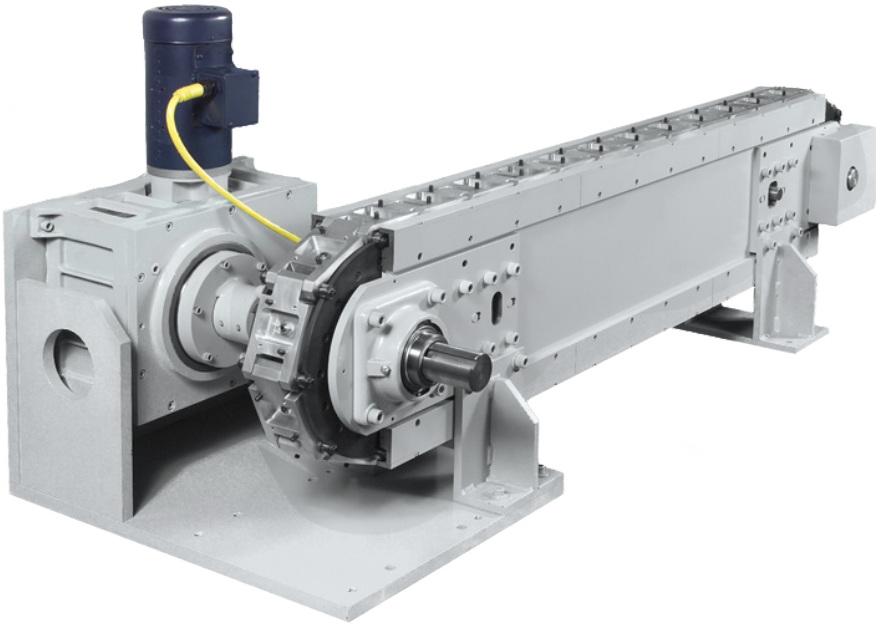

- Cyclo-Index patented motion offers controlled acceleration for a smooth index.
- Conveyor is available in carousel or over/under configurations.
- Each system has steel mounting surfaces for tooling and equipment.
- The unit employs our precision-machined link assemblies.
- Each link features internal roller bearings for precise, quiet operation.
- Precision cam followers assure durability, accuracy, and ease of maintenance.

The Cyclo-Index Precision Link Conveyor is designed to be a foundation for automation applications that require accurate positioning. The heart of this package is our proven Cyclo-Index Drive, which assures the highest quality and performance. Our standard models can be customized to fit your precise specifications for motion and speed.

### DETAILS & FEATURES

- Available in lengths divisible by 18 inches, up to a 12-foot center distance.
- Standard pitches are 1.5-, 3-, 4.5-, and 6-inch linear travel.
- +/- 0.005-inch repeatability at each station.
- 4000 Series DT Indexer drive system.

Contact us for a quote on non-standard lengths and pitches.